


## MIL-C-38999, SERIES 1 & 3, AND MIL-C-83723, SERIES 3, RECEPTACLES WITH SOLDERLESS COMPLIANT CONTACT TAILS

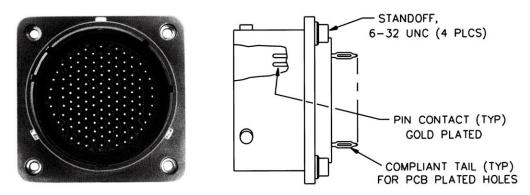

## MIL-C-38999, SERIES 1, BAYONET COUPLING


## Features:

- Direct, sealed Input/Output from circuit board to cable.
- Install connector by simply pressing onto board.
- Connector interface meets all military environmental requirements of vibration, shock, salt spray, humidity, etc.
- Contacts are factory installed in connector. Eliminates stripping, crimping, and soldering of wires from PCB to connector.
- Size 22 contacts are available for high density MIL-C-38999 layouts.
- Proprietary compliant tail design:

For use with standard plated thru holes ( $.040 \pm .003$  inch finished diameter).

Provides gas-tight electrical connection to plated thru holes. Field proven reliability.

Designed for PC boards from .093 to .250 inches thick.

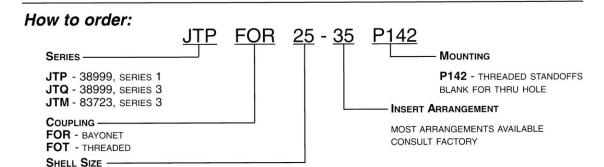

www.conesys.com sales@conesys.com